


Perforated Door Front & Rear



Maximum Static Load
1500 kg



More Details :

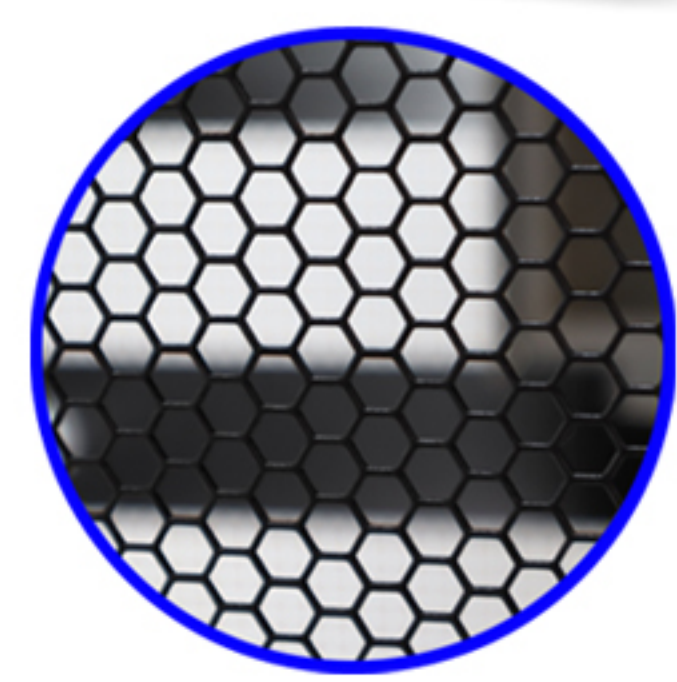

Features :

1. 19" and 24" Closed rack type available.
2. Perforated door front & rear provide excellent ventilation and protection.
3. Hexagon perforation at front door and square perforation at back door.
4. Numbered "U" positions.
5. Multifunctional roof design for cable entry, fan tray and aisle containment installations.
6. Top and bottom available with cable entry.
7. Easily Adjustable 19" mounting depth.
8. Dual section side panels with locking allows for easy removal / installation.
9. Easily adjustable levelling feet and casters.
10. Easy to assembled or disassembled.
11. Powder coating with chemical pre treatment, compact structure and high precision.
12. Various optional accessories.

Spesification 19" Perforated Door Front & Rear

Part Number	Size	Width (mm)	Height (mm)	Depth (mm)
ABBA-NC20-10900-PPG/PPB	20U	600	1045	900
ABBA-NC20-11150-PPG/PPB	20U	600	1045	1150
ABBA-NC30-10900-PPG/PPB	30U	600	1490	900
ABBA-NC30-11150-PPG/PPB	30U	600	1490	1150
ABBA-NC42-10900-PPG/PPB	42U	600	2025	900
ABBA-NC42-11150-PPG/PPB	42U	600	2025	1150
ABBA-NC42-11200-PPG/PPB	42U	600	2025	1200
ABBA-NC45-10900-PPG/PPB	45U	600	2160	900
ABBA-NC45-11150-PPG/PPB	45U	600	2160	1150
ABBA-NC45-11200-PPG/PPB	45U	600	2160	1200

Spesification 24" Perforated Door Front & Rear

Part Number	Size	Width (mm)	Height (mm)	Depth (mm)
ABBA-NC42-20900-PPG/PPB	42U	800	2025	900
ABBA-NC42-21150-PPG/PPB	42U	800	2025	1150
ABBA-NC45-20900-PPG/PPB	45U	800	2160	900
ABBA-NC45-21150-PPG/PPB	45U	800	2160	1150