


## Perforated Split Door - Front & Rear



Maximum Static Load  
1500 kg



More Details :

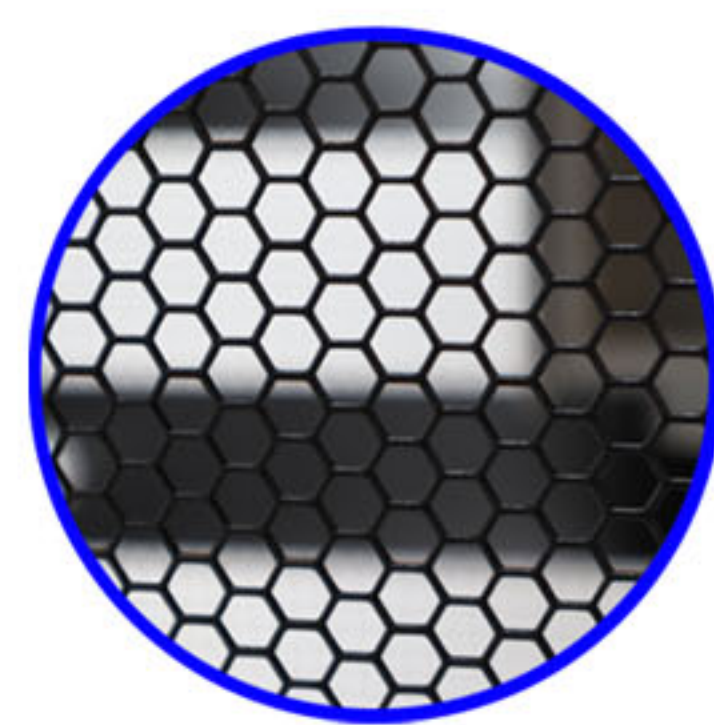

### Features :

1. 19" and 24" Closed rack type available.
2. Perforated front split door & rear split door provide excellent ventilation, protection and maximize room space.
3. Hexagon perforation at front & rear door.
4. Numbered "U" positions.
5. Multifunctional roof design for cable entry, fan tray and aisle containment installations.
6. Top and bottom available with cable entry.
7. Easily Adjustable 19" mounting depth.
8. Dual section side panels with locking allows for easy removal / installation.
9. Easily adjustable levelling feet and casters.
10. Easy to assembled or disassembled.
11. Powder coating with chemical pre treatment, compact structure and high precision.
12. Various optional accessories.

### Specification 19" Perforated Split Door Front & Rear

Part Number	Size	Width (mm)	Height (mm)	Depth (mm)
ABBA-NC20-10900-MG/MB	20U	600	1045	900
ABBA-NC20-11150-MG/MB	20U	600	1045	1150
ABBA-NC30-10900-MG/MB	30U	600	1490	900
ABBA-NC30-11150-MG/MB	30U	600	1490	1150
ABBA-NC42-10900-MG/MB	42U	600	2025	900
ABBA-NC42-11150-MG/MB	42U	600	2025	1150
ABBA-NC45-10900-MG/MB	45U	600	2160	900
ABBA-NC45-11150-MG/MB	45U	600	2160	1150

### Specification 24" Perforated Split Door Front & Rear

Part Number	Size	Width (mm)	Height (mm)	Depth (mm)
ABBA-NC42-20900-MG/MB	42U	800	2025	900
ABBA-NC42-21150-MG/MB	42U	800	2025	1150
ABBA-NC45-20900-MG/MB	45U	800	2160	900
ABBA-NC45-21150-MG/MB	45U	800	2160	1150