


CL5708M



- 17" TFT-LCD
- Superior video quality – 1280 x 1024 @ 75 Hz
- 16 Ports VGA
- Exclusive LED illumination light - designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Integrated KVM console with 17", 17.3" or 19" LED-backlit LCD monitor in a Slideaway™ housing
- Daisy-chain up to 31 additional units - control up to 512 computers from a single console
- USB port allows each computer to access USB peripherals (inapplicable to CL5716MW)

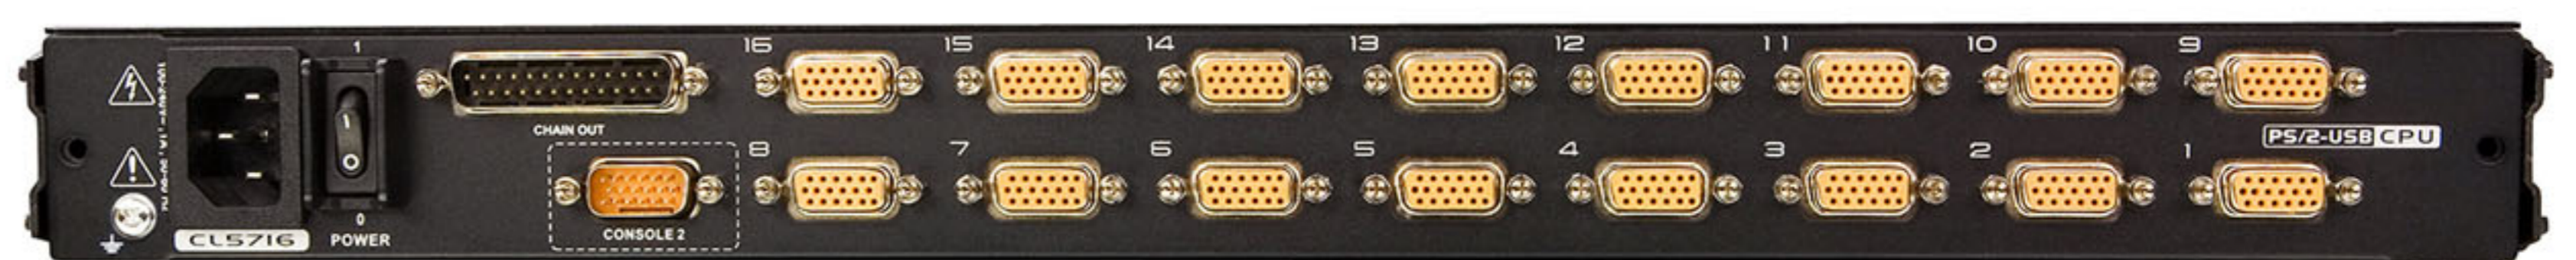

CL5708I



- 17" TFT-LCD
- Superior video quality - up to 1280 x 1024 @75 Hz
- 16 Ports VGA
- Exclusive LED illumination light - designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- 1 remote bus for KVM over IP access-allowing IT administrators to remotely monitor and control upto 8 servers
- Mouse DynaSync™ - automatically synchronizes the local and remote mouse movements



KL1516AiM



- 18.5" TFT-LCD
- Superior Video Quality – 1920 x 1200 @ 60Hz
- 16 Ports Cat5 (Ethernet Port)
- Exclusive LED illumination light - designed by ATEN to illuminate the keyboard and touchpad to allow visibility in low-light conditions
- Dual Rail – LCD monitor slides independently of the keyboard/ touchpad
- One local/remote share access bus –allowing IT administrators to monitor and control up to 16 servers

